

AW-424 All-Weather Speakers

High-performance all-weather speakers with a directed soundfield



Utilizing tough, environmentally-resistant materials and state-of-the-art acoustic design, the AW-424 lets you take Atlantic's famous sound outdoors.

The advanced design of these speakers deliver detailed, articulate sound, for a dramatic listening experience. Each speaker contains two GLH (Graphite Loaded Homopolymer) 4 1/2-inch (115mm) woofers, and an advanced 1" (25mm) ferrofluid-cooled, damped soft dome tweeter with a powerful neodymium magnet structure. The drivers are mounted in an acoustically inert, heavily-reinforced enclosure made from mineral-filled polypropylene. This is a far more neutral, less "ringy" material than is typically used with conventional outdoor speakers, and it contributes to the AW-424's amazingly musical sound.

Additionally, the woofer-tweeter-woofer arrangement controls the speaker's dispersion, assuring that its sound is directed at the prime outdoor listening area, instead of being wasted by scattering in all directions. Best of all, the sound is genuine Atlantic—detailed, powerful, and lifelike.

All the component parts of the AW-424 have been designed for durability under harsh conditions: UV and impact resistant cabinets, aluminum powder-coated grilles and mounting brackets, and gold-plated speaker terminals.




AW-424 All-Weather Speakers



Mounting Options

The clever, yet simple design of the AW-424's mounting bracket makes installation in a variety of locations a breeze. The speakers can be mounted vertically or horizontally on exterior house walls, deck corner posts, or other secure surface. The bracket has multiple holes to facilitate a variety of mounting hardware.

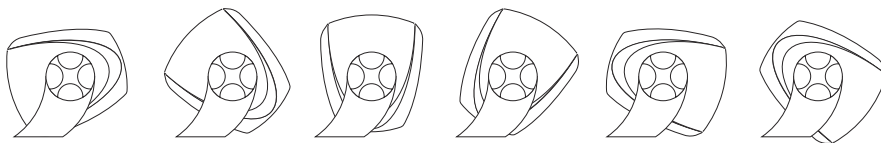

The bracket itself allows the speaker to be rotated by more than 220 degrees, for the ultimate in placement flexibility.

The speaker cabinet and grille can also be painted to perfectly blend in with their surroundings.



Angled connection cup allows for water drainage



Slotted keyhole brackets make for easier installations

Specifications

Type	AW-424 2-way with Sealed Indoor/Outdoor Speaker
Drivers	Woofer (2) 4" (115mm) GLH
Tweeter	(1) 1" (25mm) soft dome
Frequency Response	70Hz - 20kHz ±3dB
Nominal Impedance	8 ohms
Crossover Frequency	3.5kHz, 3rd order
Sensitivity	88dB
Recommended Power	10 - 150 Watts RMS
Dimensions w/grille (W x H x D)	6.875 x 12.5 x 6.5" 175 x 320 x 166mm
Weight (ea)	12lbs; 5.5kg