

**ZAKIT**

The new ZAKIT from Xantech allows a personal music device, such as an iPod™ to be easily connected to a home audio distribution system. When combined with the Xantech MRC88CTL or MRAUDIO8X8, it gives the listener the ability to plug their MP3 player into the distributed audio system and listen to their music through the audio system without sharing it with the rest of the house, keeping the portable MP3 player as the personal listening device it was intended to be.

The two single-gang J-box components (one in the listening area, one near the audio distribution system) allow the ZAKIT to be inconspicuously mounted, so the ZAKIT doesn't require large holes to be cut into a wall near eye level. Standard RCA-type input jacks allow for virtually any type of source input, so the homeowner isn't locked into one type or brand of device.



ZAKIT

**Features include:**

## • ZAKIT ZONE AUDIO INPUT KIT

Allows Zone Audio and Video connection with IR control. Perfect for connecting local in-room source equipment to A/V distribution system through Cat 5 cable over 300' away

- Fits in single gang J-box
- Connections for Composite Video, Stereo Audio, IR control

**ZA8REC / ZATRAN**

An optional accessory, the ZA8REC Eight Zone Audio Receiver allows eight local audio inputs to be connected to the zone audio inputs of the Xantech MRC88CTL or MRAUDIO8X8 distribution systems, allowing a personalized listening experience in every zone in the home, with complete local control.



ZA8REC



ZATRAN

**Features include:****ZATRAN ZONE AUDIO TRANSMITTER**

- Single Gang Decora style plate
- Transmit line level audio over CAT5 wire up to 300'

**ZA8REC ZONE AUDIO RECEIVER**

- Allows up to eight local audio inputs to be elegantly connected to the Zone Audio Inputs of the MRC/MRA controller
- Accepts input of up to eight ZATRAN Zone Audio Transmitters

**SPECIFICATIONS**

Input level: 0-2V p-p

Gain: +10dB at transmitter, -10dB at receiver, 0dB total

Frequency Response: +/-0.5 dB 20Hz to 20KHz

THD + noise: <0.01%

IR Input/Output Levels: +12V


IR Bandwidth: 100KHz

Wire Requirements: CAT5

Input Power: 12VDC

### Alternate Area (Kitchen, Bedroom)

The ZAKIT from Xantech allows a personal music device, such as an iPod™ to be easily connected to a MRC88/MRAUDIO8X8 home distribution system for a personalized listening experience with complete local control.

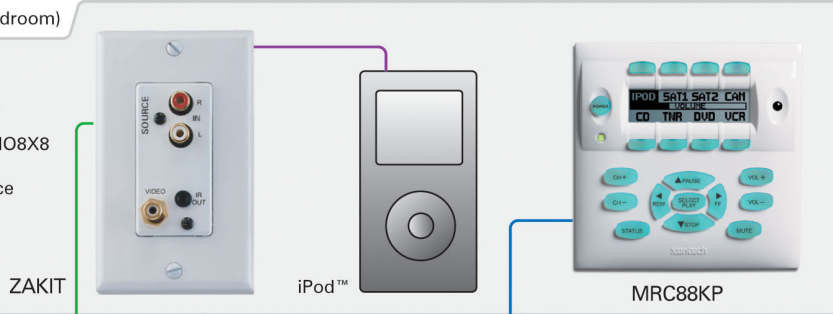

### Equipment Area

cat5



### Equipment Area

Use the ZA8REC and ZATRAN when using multiple local zone audio input devices.

