



## Key Features

- Durable design is waterproof and it floats.
- Comfortable ergonomic design permits effortless, one-handed operation.
- The perfect selection of buttons for basic audio/video control.
- Four source and eight general purpose buttons are fully assignable/programmable.
- Easy-to-use Windows® based software for programming and customization.
- Transmits commands using RF for operation through walls, cabinets, etc.
- Completely customizable, programmable, and upgradeable.
- Tactile feedback on all buttons.
- Includes mounting clip for attaching to walls or other surfaces.
- Optional 'Voltage' and 'Video' sensing modules to monitor power status of equipment.
- Optional interface for RS-232-controlled equipment.
- Non-volatile Flash memory stores your system configuration even when power is not present.
- Field upgradeable firmware.
- USB Programming
- Includes four (4) AAA alkaline batteries

## U1 Waterproof Controller

The U1 Remote Control provides a rugged interface option for communicating with RTI remote control processors.

The U1 was designed for reliable wireless control of audio/video systems from environments which are too harsh for normal remote controls. It is completely sealed, making it both waterproof and floating. Whether indoors or out, the U1 is a perfect companion for hot tubs, pools, bathrooms, and decks.

## Description

The U1 Remote Control is programmed using the same intuitive TheaterTouch Designer™ Software that RTI has become famous for. The U1 allows the basic functions of other factory remotes to be combined into a simple one-handed user interface for command of any audio/video system.

The U1 is designed to be used with RTI remote control processors, making it more than just another remote control – it's an expandable control system. When used with the available RTI accessory devices, the U1 is capable of power sensing for reliable operation, and RS-232 communications for advanced control.

Call 952-253-3100

[www.rticorp.com](http://www.rticorp.com)



## Specifications

<b>Power</b>	4 AAA alkaline batteries
<b>Radio Frequency Control Range</b>	Up to 100 feet (30.5 meters)
<b>Radio Frequency Carrier</b>	433 MHz
<b>Operating Temperature</b>	+32°F to +122°F (0°C to +50°C)
<b>Operating Humidity</b>	5% to 100%
<b>Standby Time w/New Batteries</b>	1000 Days
<b>Total System Memory</b>	16K Bytes (non-volatile) Flash memory
<b>Device Capability</b>	Four device pages (sources)
<b>Macro Capability</b>	Macro capability on every button
<b>Communications</b>	USB Programming Port
<b>Dimensions (L x W x D)</b>	5.9" (150mm) x 2.3" (59mm) x 1.2" (30mm)
<b>Enclosure</b>	High-impact molded ABS with textured finish
<b>Weight</b>	5.5 oz. (156g) with batteries
<b>Warranty</b>	One Year (Parts & Labor)

*All specifications subject to change without notice.*



7651 Anagram Drive, Eden Prairie, MN 55344  
Ph: (952) 253-3100 • Email: info@rticorp.com


## Accessories

- RP-1 Remote Control Processor**
- RP-6 Remote Control Processor**
- RM-433 RF Receiver**
- CM-232 Communication Module**
- VPS-1 Voltage Power Sensor**
- SPS-1 Video Sync Power Sensor**



## Other RTI Products

- T1 Universal System Controller**
- T2+ Universal System Controller**
- T3 Universal System Controller**
- T4 Universal System Controller**
- RK3 In Wall Universal Controller**
- K4 In Wall Universal Controller**
- IR-PRO Infrared Capture System**

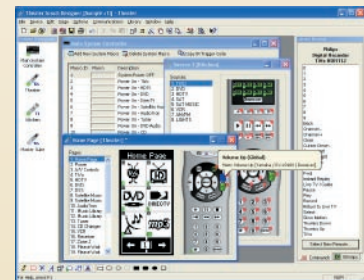

TheaterTouch Designer™ Programming Software

Call 952-253-3100  
www.rticorp.com

